


TESTING THE MAIN GROUND

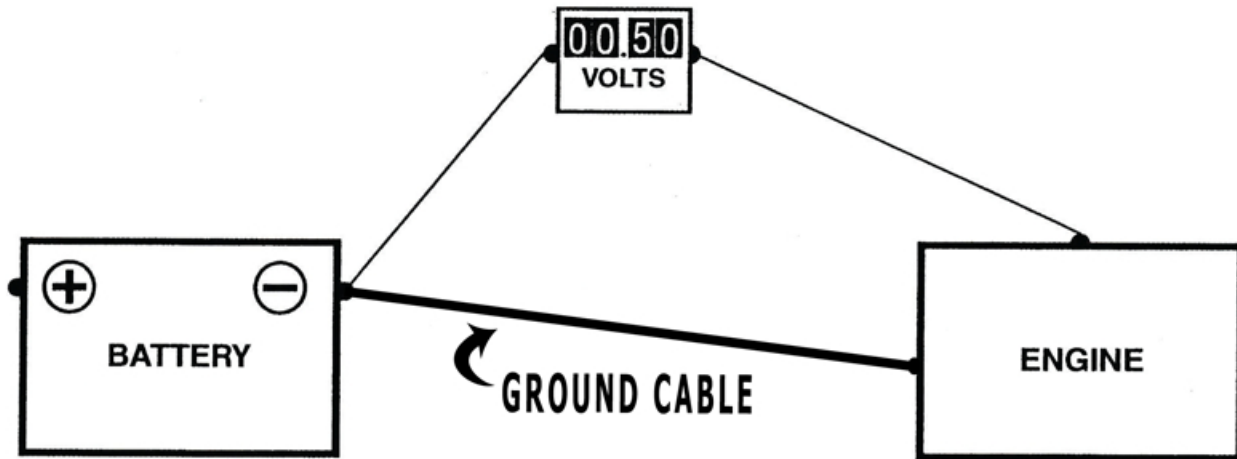

1. Safely disable the ignition or fuel system so the engine won't start.
2. Securely connect the voltmeter to a clean spot on the engine and to the negative battery post or terminal.
3. Crank the engine for 5-7 seconds.